



## Recommended Installation Tools and Equipment

The following are typical tools that should be available onsite for the installation of your kit. Most of these tools are typical tools found in most experienced carpenter tool kit. If you do not have these tools available, Innova can provide complete tool kits as an added cost and ship them along with your building kit.



**Craftsman 48" and 96" Level**




**Stanley 47-974 - 16oz Brass Plumb Bob**

SIZE: 16 oz.



**Framing Square**



**Speed Square**



\* Acetylene Gas Torch and Tanks



\* 1" to 1 1/4" diameter Steel Balls 2 each required

**\*\*\* Only required if you are field installing electrical chases**



14" Chop Saw



**Heavy Duty Cordless screw guns with extra batteries. Need square tip and Phillips tips.**



**Hammer Drill for drilling into 4" concrete slab with 1 ¼" bit**



**Heavy duty 7 ¼" circular saw – worm drive**



**Sawzall and Blades for cement board and wood**



**Chalk Line - Red**



## 4" and 7" Angle Grinder



Best Prices & Reviews On

**Fiberglass Ladder**



amazonassociates

Ladders: 1 extension 12/24', 1 step ladder 8' or 6'



Metal Sheers



Hammer



100' and 25' tape measures



Caulking Gun



Channel Lock Pliers



Utility Knives and Blades




Flat Bar



Heavy Gauge Heavy Duty Contractor  
Extension Cords – 2 ea 100 foot long and 2 ea 50 foot long



3 each 20' ratchet straps

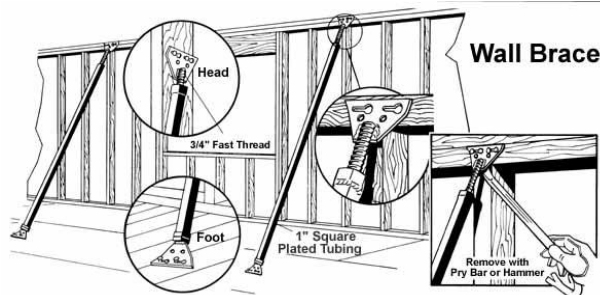

**Wall Bracing:** You will need some type of temporary wall bracing to use to align the wall until the roof panels are set and loaded. We can also use pieces of 3/4" emt conduit with flattened ends and drilled holes, for braces. We will need approximately 50 braces per kit.

Miscellaneous items including blades, drill bits, fasteners:

**Pencils**

**Utility Knife extra blades**

**APEXs- #2 Cross point/ Square head, extensions, 1/4 box drive**

**1/2 in hammer drill bits (large slot drive) & bits 5/8 & 1/2in**

**Drill Bits – 1/2 x 8" (x3) concrete / masonry,**

**5/8 x 8" masonry, drill bit (x3)**

**1/4 x 8" metal drill bit (x5)**

**1/4 x 4" tapcon drill bits, (x20)**

**3/16 x 4" tapcon drill bit (x20)**

**8" x 1/4 wood drill bit**

**Skill saw Wood blades 7 1/4**

**Diablo fiber cement Blade 7 1/4**

**4" grinder diamond Blades for cement and Metal Blades**

**Sawzall blades Long 8" & 12" all purpose cutting**

**2" self tapping screws (braces)**

**Nail bags**

**\*If power is not available at the project site,  
portable generators will be required**